
SSM SUSUMU





- \cdot Low DCR and large current for small sizes
- · High efficiency and low loss



free






Applications

· PCs, servers, power sources, mobile devices, flat screen TVs etc.

◆Part numbering system

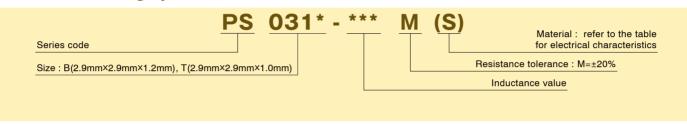

Rated current: the current that increases the temperature by 40°C Saturating current: The current that reduces inductance by 20% (PCMC) or 30% (PCMB/PS/PST/PL) *Contact us for details.

◆Dimensions, Electrical characteristics

